


# Automatic Retractable Bollard (Electric)

**Electric Automatic Retractable Bollards** are intended for applications where automatic operation is necessary, but where flush mounting is required when the bollard is in the retracted state.

Multiple electric retractable bollards can be operated together to secure larger openings in place of an automatic gate system.



Extended Position

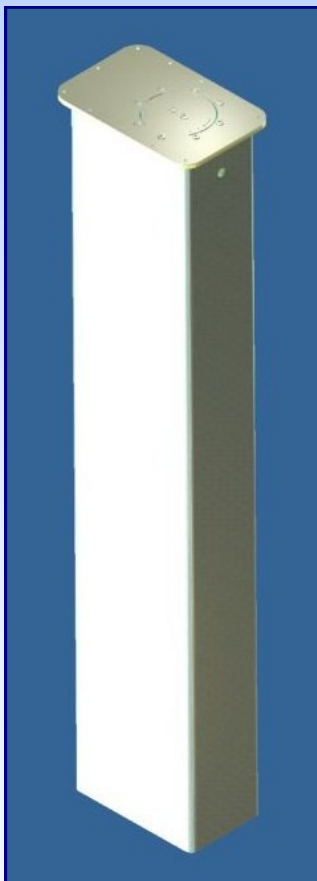

Retracted Position



Convenient remote control operation

## Product Features:

- ☑ Fast operating speed.
- ☑ Automatic detection of overload and load reversal.
- ☑ Grade 316 stainless steel surface plate and post.
- ☑ Polymer post guides for smooth, silent operation.
- ☑ All in-ground components are Zinc Plated for superior corrosion protection.
- ☑ Battery back-up to maintain site security in the event of a power outage.

## Specifications

Product Description	In-ground, automatic electric retractable bollard
Corrosion protection	Electrolytic zinc to all in-ground components, above ground components are grade 316 stainless steel
Decorative Finish	Brushed stainless steel
Material	114mm diameter post – 5mm thick
Height	800mm above ground, 1300 mm in-ground
Fixings	Concrete in-situ
Operating Speed	160 mm/sec (no load), 135 mm/sec (full load)
Weight	81Kg fully assembled

## CONTACT:

**Phone:** (08) 9246 9923  
**Fax:** (08) 9246 9963  
**Email:** [ask-us@accesstechnologies.com.au](mailto:ask-us@accesstechnologies.com.au)  
**Web:** [www.cablegate.com.au](http://www.cablegate.com.au)

