



we put you in control...

## ZoneGuard™ Product Specifications

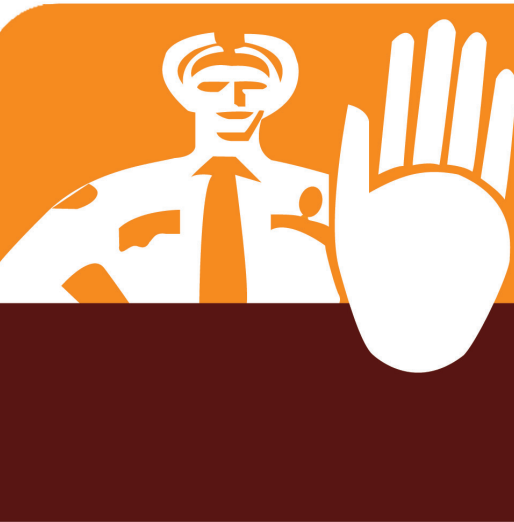


### ZoneGuard™ is ideal for:

- Foundries and Chemical Plants
- Manufacturing and Processing plants
- Quarries and Minesites
- Loading Docks and Loading Bays
- Waste Processing and Recycling Facilities
- Warehouses and Workshops

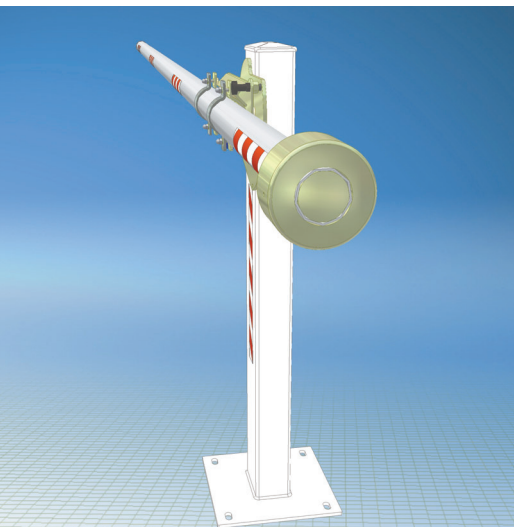

### ZoneGuard™ Manual Boom Gate:

<b>Boom Arm Length:</b>	5 metres as standard (other lengths to order)
<b>Boom Arm Material:</b>	80mm O.D. Aluminium tube, 3mm wall
<b>Spindle Bearing:</b>	80mm deep groove ball bearing
<b>End Stops:</b>	Cammed action onto urethane bush
<b>Locking Mechanism:</b>	Spring loaded, hardened alloy-steel pin
<b>Breakaway Bolts:</b>	4 x M8 nylon to fail at 60 KGF
<b>Shipping Weight:</b>	47 Kg
<b>Mounting Holes:</b>	4 x 11mm diameter to suit M10 x 30 Grade 8 bolts

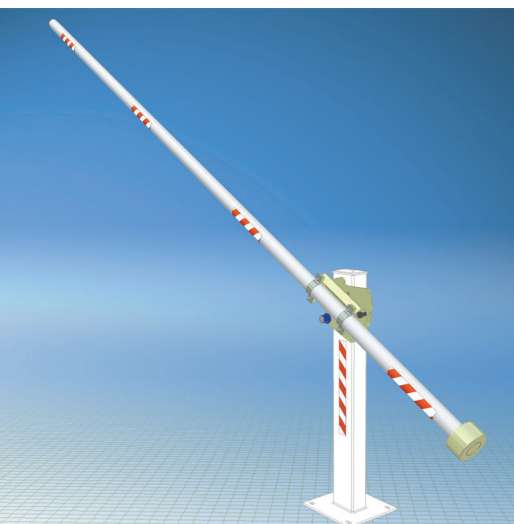

### Optional Mounting Post:

<b>Mounting Post (opt.):</b>	150mm x 100mm steel RHS c/w pressed steel cap
<b>Base Plate:</b>	10mm mild steel base plate
<b>Boom Arm Height:</b>	1100mm above base plate
<b>Shipping Weight:</b>	28 Kg
<b>Mounting Holes:</b>	18mm diameter holes for 16mm Chemical Anchors

